

→ ROLLBLOC DIE LOADING ARMS

WITH SPACE-SAVING

ASYMMETRIC SWIVEL ACTION

ROLLBLOC Die Loading Arms CA 01/02





Swivel version, asymmetric

Fixed to the press table
With locking mechanism

Type list

Load bearing capacity	Length L	Attachment height A	Order code	Loading arm dimensions		Hole pattern	
				E	G min.	D min.	B
10 kN	500 mm	195 mm	CA01/0500 F	230	500	415	80
10 kN	800 mm	195 mm	CA01/0800 F	230	800	715	80
10 kN	1000 mm	245 mm	CA01/1000 F	280	1000	915	130
20 kN	500 mm	195 mm	CA02/0500 F	230	500	415	80
20 kN	800 mm	245 mm	CA02/0800 F	280	800	715	130
20 kN	1000 mm	295 mm	CA02/1000 F	330	1000	915	180

See fold-in flap on left for supplementary order designation

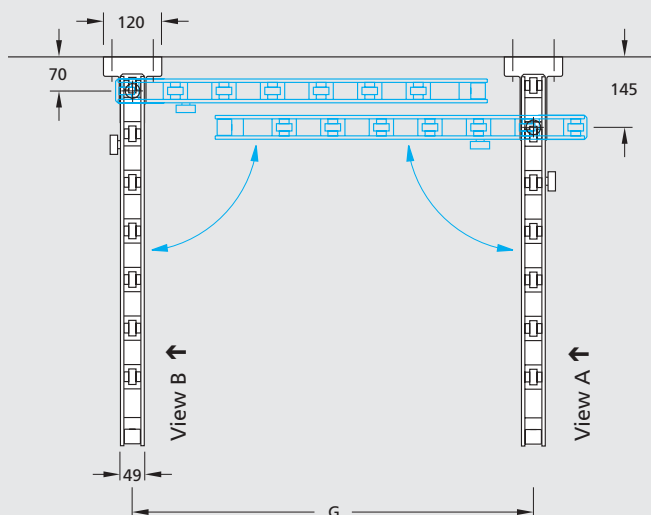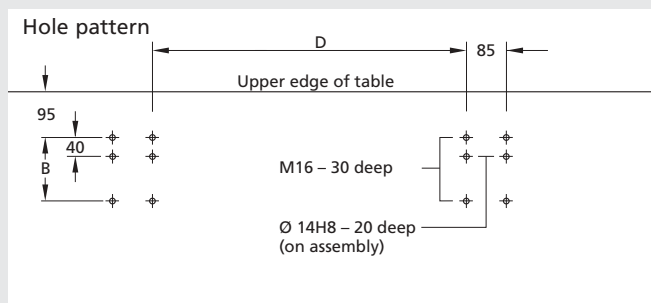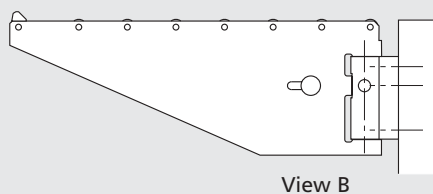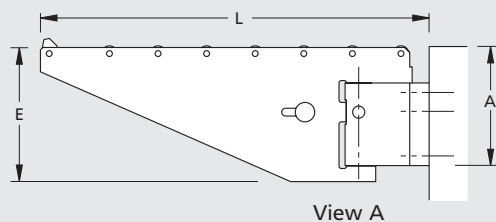

→ FOR FIXED MOUNTING TO THE PRESS TABLE

ROLLBLOC Die Loading Arms CA 04/06

Swivel version, asymmetric

Fixed to the press table
 With locking mechanism

Type list

Load bearing capacity	Length L	Attachment height A	Order code	Loading arm dimensions		Hole pattern	
				E	G min.	D min.	B
40 kN	800 mm	345 mm	CA 04/0800 F	400	780	670	315
40 kN	1000 mm	395 mm	CA 04/1000 F	450	980	870	365
40 kN	1250 mm	445 mm	CA 04/1250 F	500	1230	1120	415
60 kN	800 mm	445 mm	CA 06/0800 F	500	780	670	415
60 kN	1000 mm	525 mm	CA 06/1000 F	580	980	870	495
60 kN	1250 mm	625 mm	CA 06/1250 F	680	1230	1120	595

See fold-in flap on Page 28 for supplementary order designation

